


Approved for Issue - 4 June 2008

## FORM 22 – 800 x 800

Robust, Low Profile & Designed for fitting onto wooden floors, these 22mm thick GRP wet room shower bases replace part of the floor, creating a gradient leading to a waste outlet. Designed for a Tile Finish, although pumped wastes or commercial floor finishes like vinyl are options.

E&OE

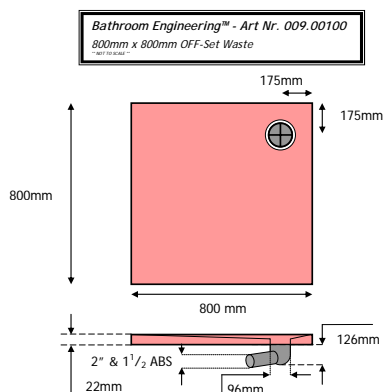

### PRODUCT CHARACTERISTICS

- GRP based hard Shower Base c/w Flat Underside, 17mm Gradients leading to Outlet with Factory Fit Collar to suit Waste Kit
- Self Supporting Waste & Trap Assembly with Horizontal outlet pipe (DIN 50mm)(Vertical available- special order)
- Stainless Steel Outlet Grate with Height Adjustment
- OPTIONAL - Installation Sealing Kit comprising Joint Sealing Tape & Waterproofing Sealant (see iForm 22)

### APPLICATIONS

AquaeFORM 22 kits are suitable to construct the floor of a shower area within a wet room type bathroom. Suits:

- En-Suites – small bathrooms where space efficiency is at a premium
- High End Designer Bathrooms – Large sizes add to the feeling of space within a shower area
- Wheelchair & Special Needs– Bathrooms where accessibility is a essential element of the design
- Refurbishments & New Build
- Floor Structures – Designed for Board over Wooden Joist

### TECHNICAL DATA – DIMENSIONS & SIZE

- Sizes : 800 x 800
- Profile : Low Profile 22mm at the outer edge
- Gradient : 17mm generally, dependant upon point of measurement
- Waste & Trap : 2" UK (c/w 1½ ABS Converter )
- Waterproofing Kits : AquaeSEAL – UNO (5m<sup>2</sup>) or MEDIO (10m<sup>2</sup>) – See Data Sheet  
(Optional Extra) : AquaeTILE –UNO (5m<sup>2</sup>) or MEDIO (10m<sup>2</sup>) – See Data Sheet  
: Other Systems – Contact us

### TECHNICAL DATA – MATERIAL

- Shower Base : GRP, 22mm Thick, with a 17mm Gradient leading to the Outlet
- Grating : 5mm thick 304 Stainless Steel Plate
- Grating : Height Adjustment, 6mm to 26mm for ceramic tiles
- Waste & Trap : ABS Solvent Weld 126mm Deep, designed for tiles
- Outlet : Location is Model Dependant – Off-set
- Weight Loading : Will support in excess of 250kg
- Gradient : 17mm Gradient runs in all directions across the length or width of the base

Approved for Issue - 4 June 2008

**TECHNICAL DATA – OPTIONS**

- This model is designed for Tiles. Contact us for the following options
  - : Grating for Vinyl Floors (Normally Commercial, Industrial & Institutional Projects)
  - : Pumped Drainage (when gravity drainage isn't available)
  - : Alternative Waterproofing
  - : Undertile Heating (contact us for further info)

**CAPACITY**

- Waste & Trap : Horizontal (max 22Ltrs/Min). Call us to confirm the latest Specification

**DISPOSAL**

- Packaging : To be disposed of according to local bylaws.

**INSTALLATION INSTRUCTIONS**

- See Separate Sheet : Included in Package

**PACKAGING**


- Base : Protective Corners & Shrunk Polywrap
- Waste & Trap : Cardboard Box to suit all ancillaries

**CONTENTS**

Supplied in 2x BOXES (product Dependant)

- Shower Base
- Waste & Trap – Horizontal / Vertical
- Stainless Steel Grating
- Installation Instructions

Range	Size	ART No.
FORM 22	800 x 800, OFF-SET Outlet, Horiz Waste, Install Kit	009.00100

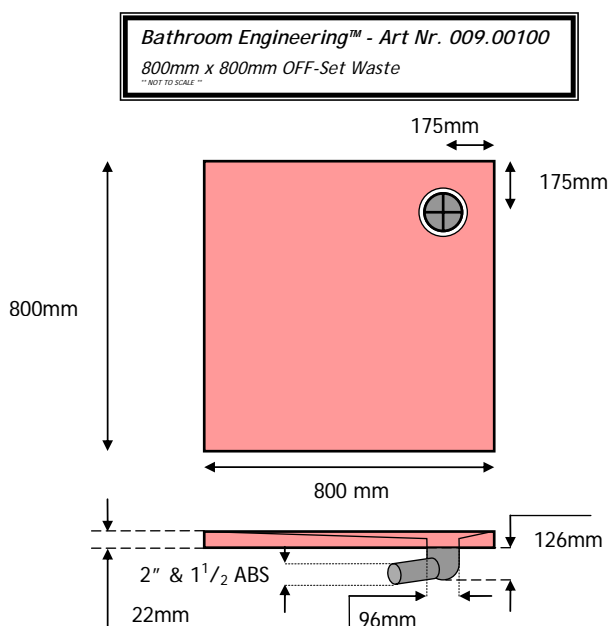

E&OE  
 We reserve the right to alter & amend specifications without prior notice  
 This is not a specification document & does not guarantee performance  
 © Bathroom Engineering™ June 08

Bathroom Engineering™ is the trading name of Linden Wray Ltd.  
 Registered in England N<sup>o</sup>. 4323895